


## Exclusively for HVAC Professionals!

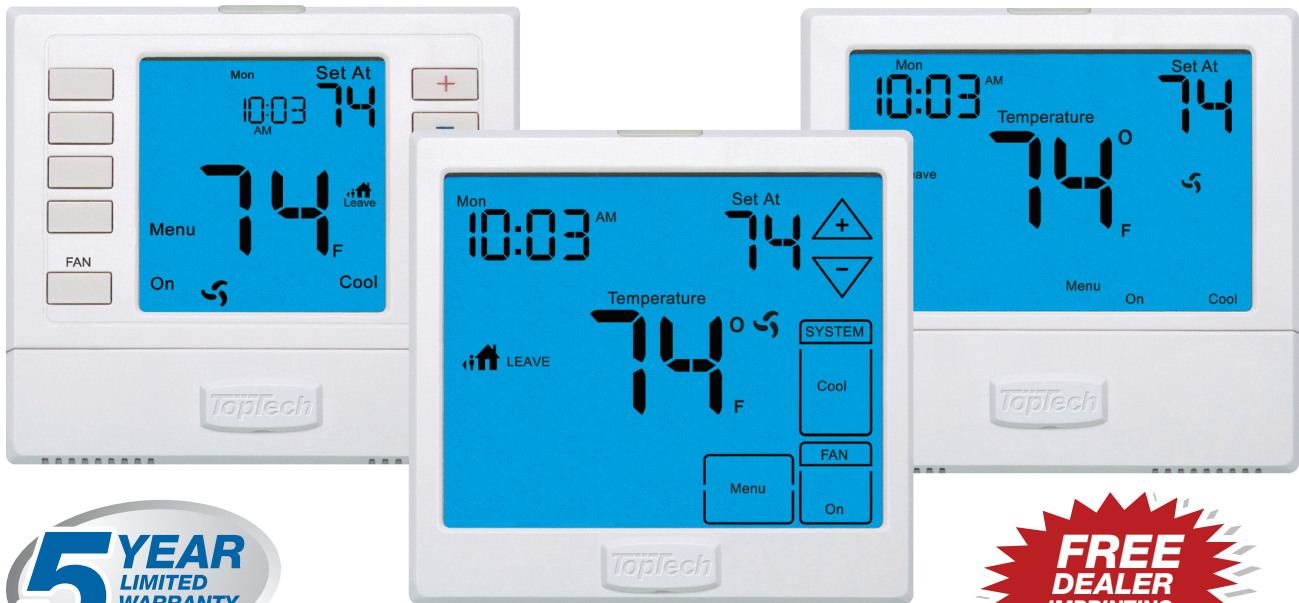

## Why Choose TopTech Thermostats?

- 1 **Larger displays are brighter and better.** The **TopTech** line of thermostats boasts the largest displays for the price. You simply will not find a better value.
- 2 **One stat does it all!** Our thermostats give you the flexibility and ease of use to make your installations painless. Our Universal design (up to 3H/2C) and exclusive upgrade path allows a system to be upgraded without rewiring a subbase.
- 3 **Easy dealer imprint.** With the best private label program in the industry. Spend less on inventory and more time giving your customers the exact model they need, using our exclusive “badge system”. The best dealer imprinting program in the industry.

Available Now!  
**Wireless**  
Temperature  
Control System

Universal  
3H/2C Heat Pump  
2H/2C Conventional



Master  
Thermostat



Outdoor  
Remote  
(optional)



Indoor  
Remote  
(optional)

Wireless Range

The range between devices is up to 100 feet with no obstructions or up to 50 feet in standard residential construction.

**TopTech**  
Model #

**7D** 7 Day Programmable  
**5/1/1** 5/1/1 Programmable  
**NP** Non-programmable

TopTech Model #	Wireless	Stages of Heat	Stages of Cool	Gas, Electric or Oil	Heat Pump	Milivolt	Battery Power	24V Power (Hardware)	Dual Fuel Compatible	Display Size (Square Inches)	Auto Changeover	Filter Change Reminder	Room Temperature Calibration	Minimum Compressor Run Time	Compressor Short Cycle Delay	Adjustable Heating Temperature Swing	Adjustable Cooling Temperature Swing	Programmable Fan	Keypad Lockout	Adjustable Setpoint Limits	Averaging Remote Sensor	Humidity Control	Memory Type (Permanent)	Touchscreen	Warranty (Years)	Terminals Shielded cable not required
<b>TOUCHSCREEN</b>																										
TT-S-955WH**	<b>N</b>	3*	2	•	•	•	•	•	<b>H</b> 13	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O, H, D	
TT-S-955W**	<b>N</b>	3*	2	•	•	•	•	•	<b>H</b> 13	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O	
<b>Wired</b>																										
TT-S-955	<b>N</b>	3*	2	•	•	•	•	•	<b>S</b> 13	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O	
TT-S-925	<b>N</b>	3	2	•	•	•	•	•	<b>S</b> 13	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	R, C, Y, Y2, W2, E, G, B, O, L	
TT-S-915	<b>N</b>	2	2	•	•	•	•	•	13	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	R, C, Y, Y2, W, W2, G, B, O	
<b>LARGER</b>																										
TT-S-855	<b>N</b>	3*	2	•	•	•	•	•	<b>S</b> 8	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O	
TT-N-851	<b>N</b>	3*	2	•	•	•	•	•	<b>S</b> 8	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O	
TT-N-801	<b>N</b>	1	1	•	•	•	•	•	8	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, W, G, B, O	
TT-S-755	<b>N</b>	3*	2	•	•	•	•	•	<b>S</b> 6	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O	
TT-N-751H	<b>N</b>	3*	2	•	•	•	•	•	<b>S</b> 6	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O, H, D	
TT-N-751	<b>N</b>	3*	2	•	•	•	•	•	<b>S</b> 6	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O	
TT-N-721	<b>N</b>	2	1	•	•	•	•	•	<b>S</b> 4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	R, C, Y, W2, E, G, B, O	
TT-P-705	<b>N</b>	1	1	•	•	•	•	•	4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, W, G, B, O	
TT-N-701	<b>N</b>	1	1	•	•	•	•	•	4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, W, G, B, O	



\* 3 heat stages for heat pump or 2 heat stages for conventional.  
 \*\* Wireless accessories available for **TT-S-955WH** and **TT-S-955WH**.  
**TT-RIS-251W** is an indoor remote temperature sensor.  
**TT-ROS-250W** is an outdoor remote temperature sensor.

**H** Dual fuel hardware balance point. Requires outdoor temperature accessory **R250W**.  
**S** Dual fuel software setting. **Y** de-energizes when **W2** energizes.  
**N** Available Mid 2010

For more information and free label form visit:  
[toptech.pro1iaq.com](http://toptech.pro1iaq.com)

For information by phone:  
**888.776.1427**  
 (Monday - Friday 9am-6pm Eastern)